

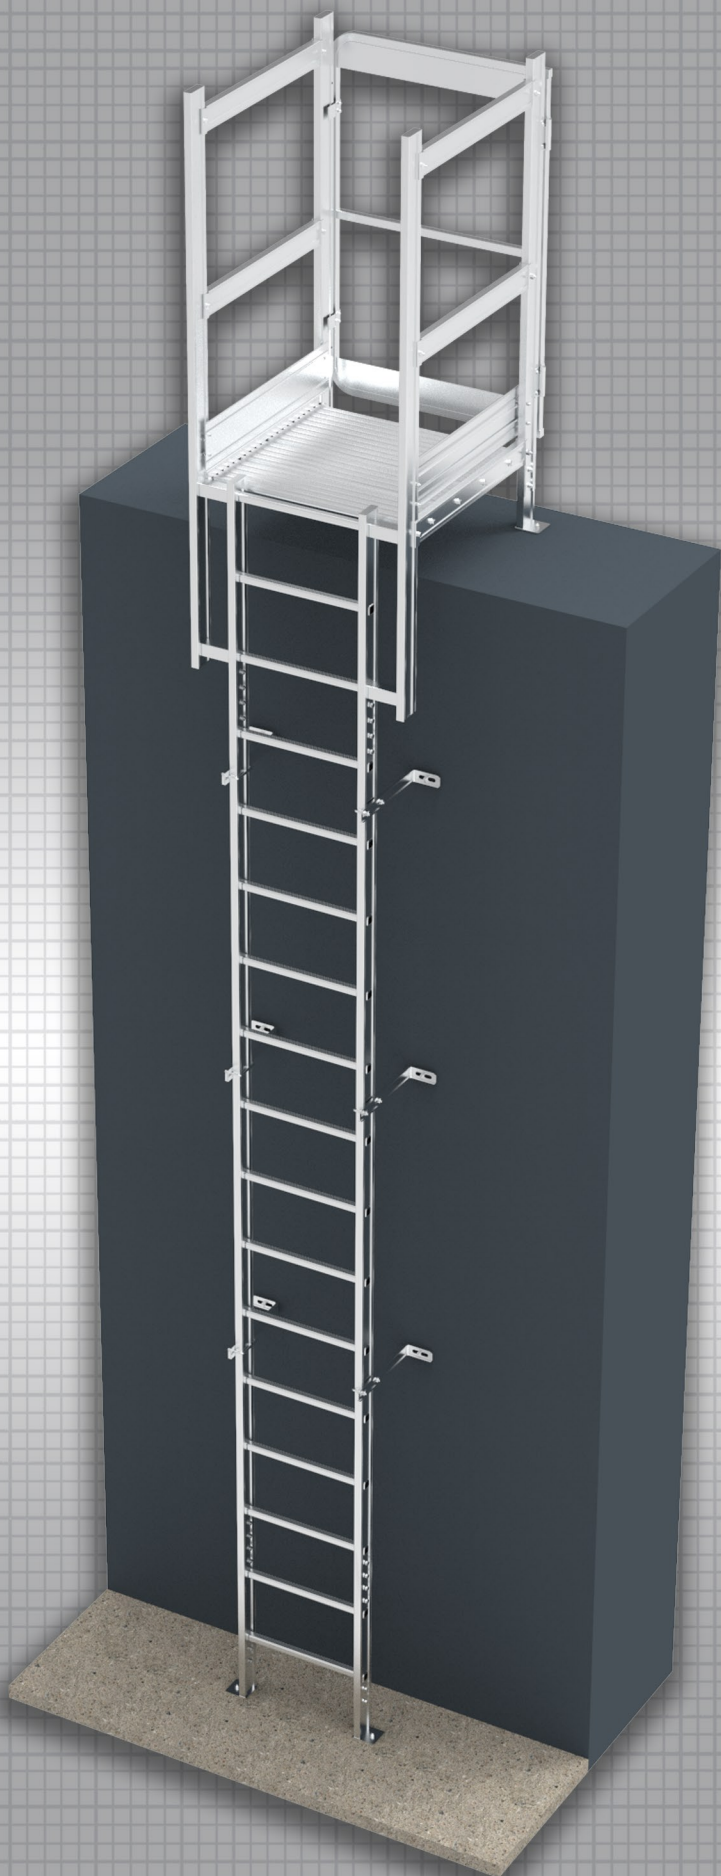


FIXED LADDER

BASIC




EN14122-4:2016

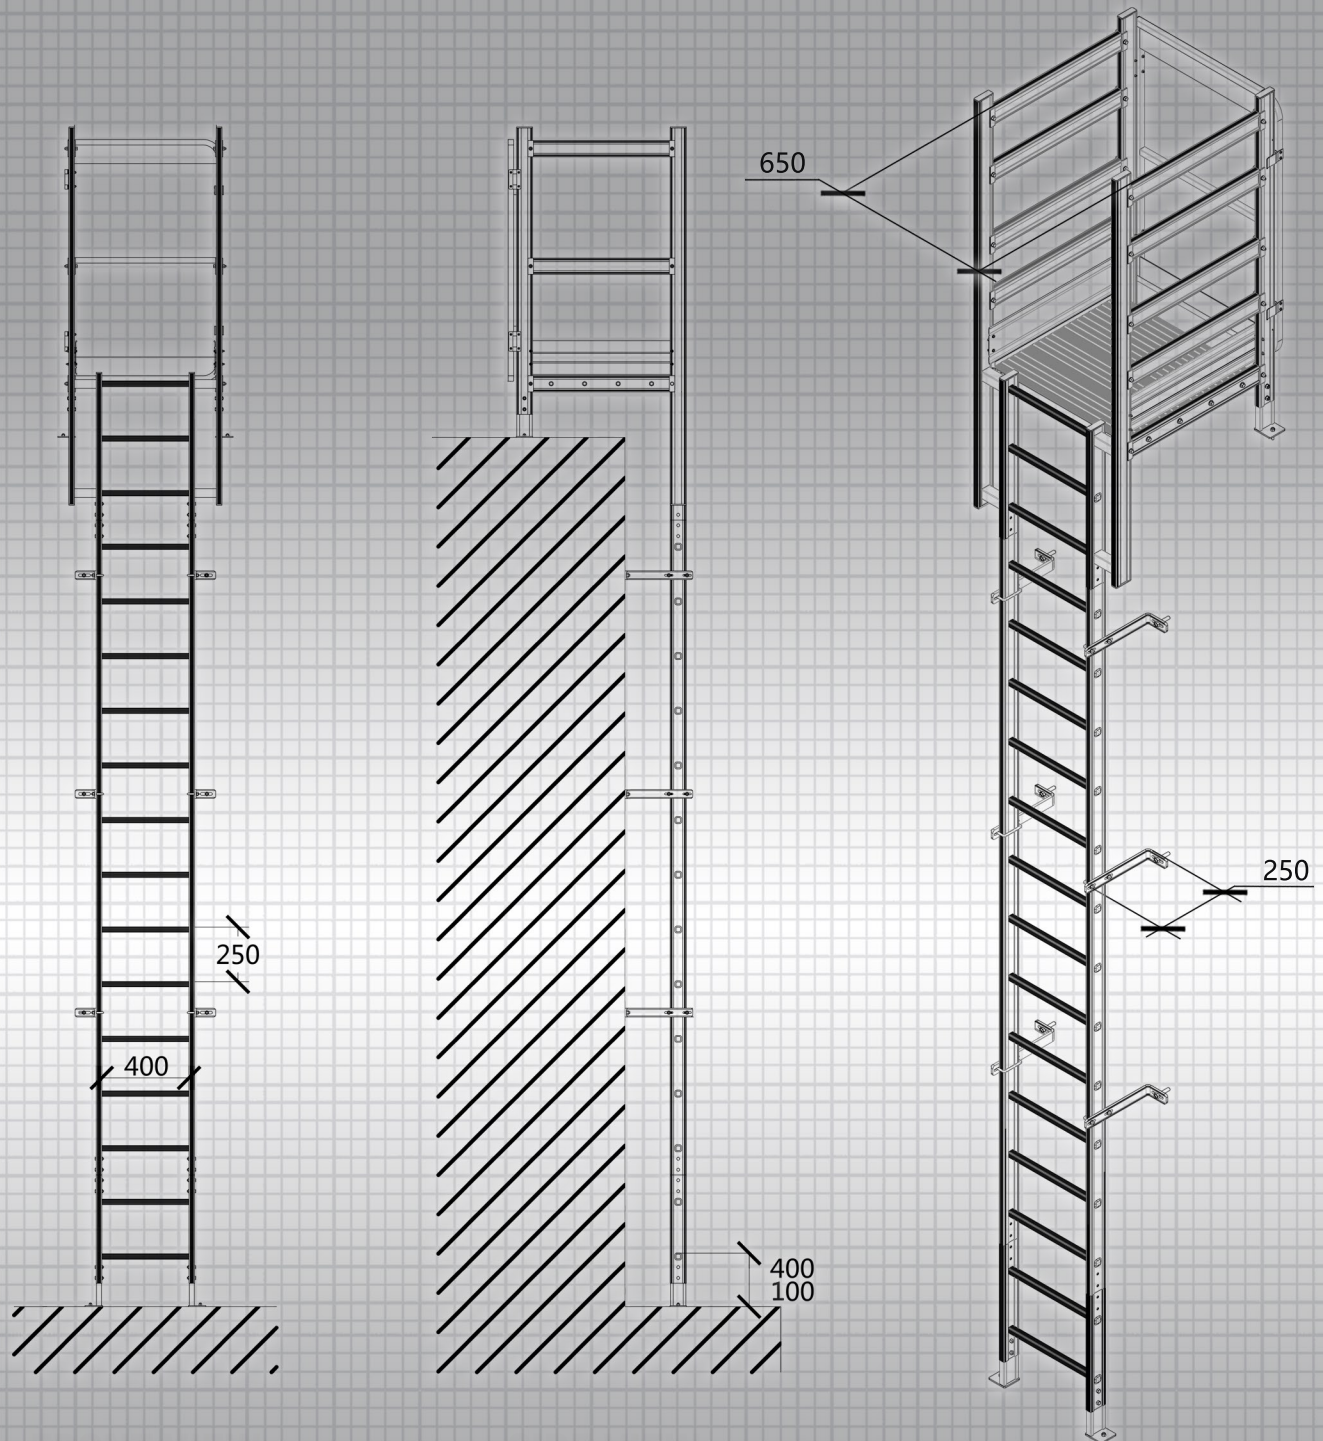


BASIC LADDER

EN 14122-4 : 2016

Fixed Ladders are available in a variety of kits to suit different applications. Various options are available for these modular, aluminum access ladder systems to ensure every need or safety standard can be met.



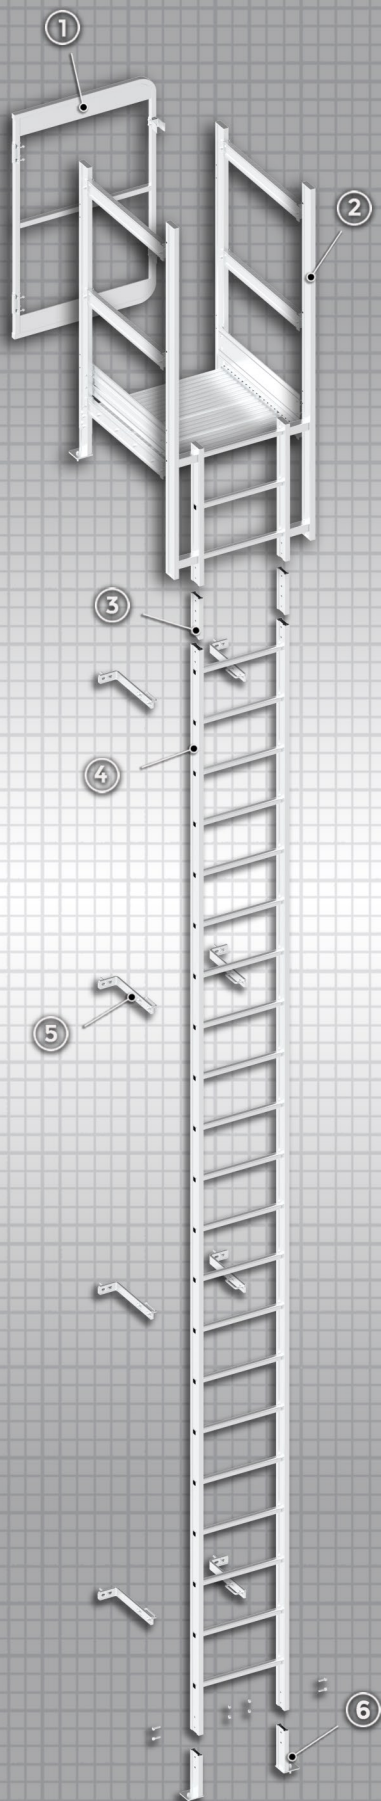

① **Self-closing door**
One way direction


② **Landing platform**
Width 650mm

③ **Rail junction**
Connect rails with screws

④ **Ladder modular**
Non-corrosive design with antislip rung



⑤ **Wall bracket**
Support the ladder modular

⑥ **Floor bracket**
Mount stringer to the floor

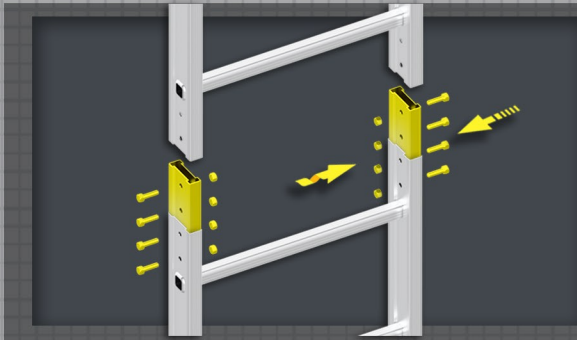



Rail junction enhances the strength and provides non-welding onsite installation

Connect the ladder modular and wall bracket with U-bolt

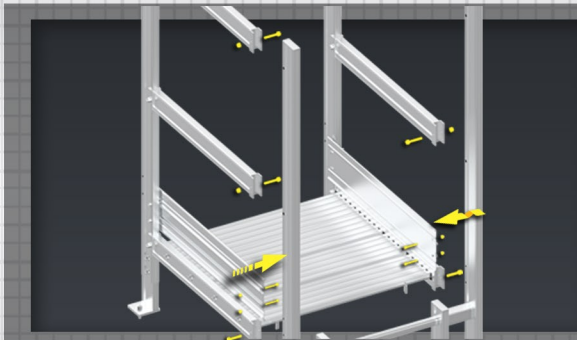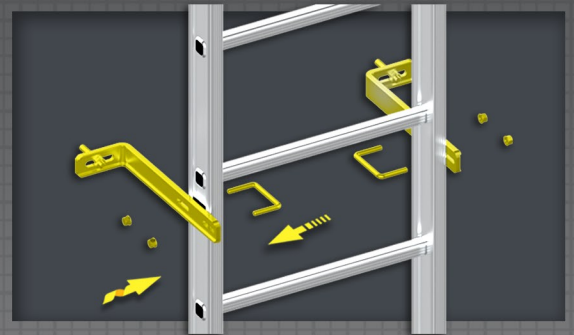

Fix the ladder platform and exit by tighten screw

The cage is mounted to stringers by U-bolts
(Cage purchased separately)

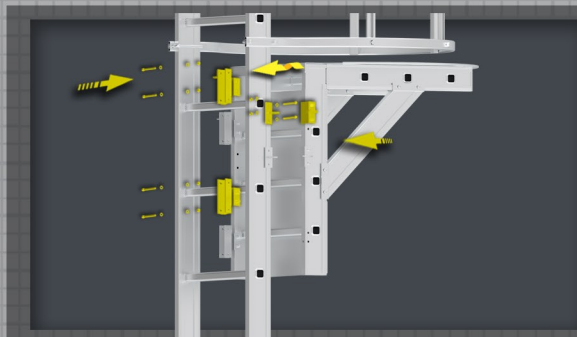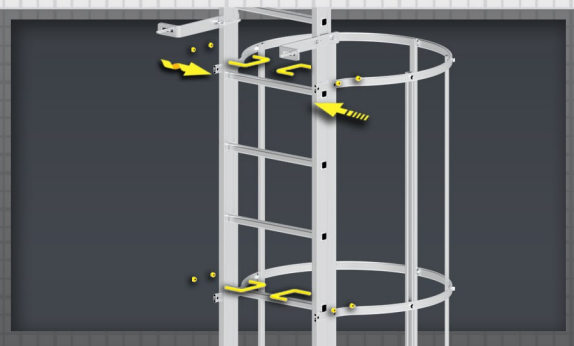

Connect access gate and ladder through vertical hinge and screw
(Cage purchased separately)




BASIC LADDER

Fixed ladder systems are subject to a separate set of standards. Because they are permanently installed on buildings.







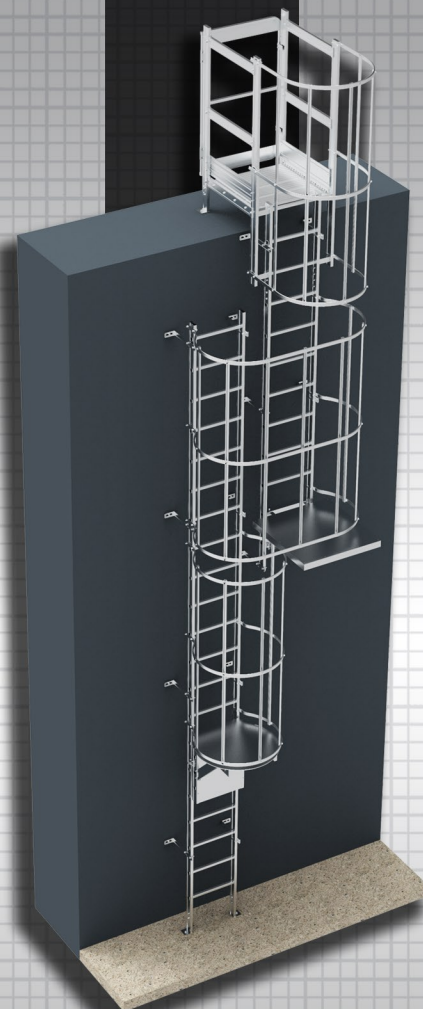











CAGE LADDER


When a fixed ladder extends more than 20 feet, you are required to have a cage to meet safety requirements. It works perfectly with personal fall arrest system.



MULTI SECTION LADDER

Multi-section ladders with a climb of 24 feet or more require rest points. These are meant to protect climbers as they ascend. Previously, a fixed ladder with a cage required a landing platform at a maximum interval of 30 feet.

	Landing Platform <i>LP-EP060</i>		Landing Exit <i>LP-STL-EXT</i>		Self Closing Door <i>LP-STL-GA</i>		Rest Platform <i>LP-SE100</i>
	Ladder Kit <i>LP-STLXXX</i>		Wall Bracket <i>LP-STL-WF</i>		Ladder Junction <i>LP-STJ01</i>		Floor Fixing <i>LP-STL-FF</i>
	Ladder Security Door <i>LP-STL-AD</i>		Foldable Rest Landing <i>LP-STL-RR</i>		Ladder Access Gate <i>LP-STL-CL</i>		Multi Section Landing <i>LP-STL-RE</i>
	Single Hoop <i>LP-HO-ST</i>		Multi Section Hoop <i>LP-HO-DB</i>		Cage Bar <i>LP-HP050</i>		Cage Bar Junction <i>LP-HPJ01</i>

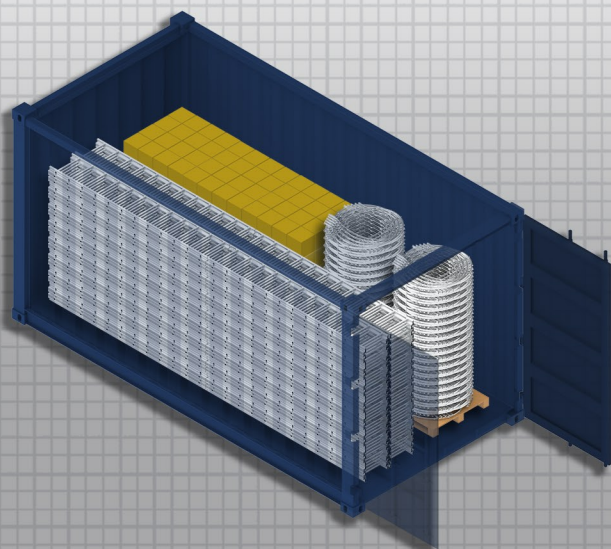


A 20' GP container


Capable of loading approx. 800 meters of cage ladder.



Hardware carton
Vairaty of hardwares included

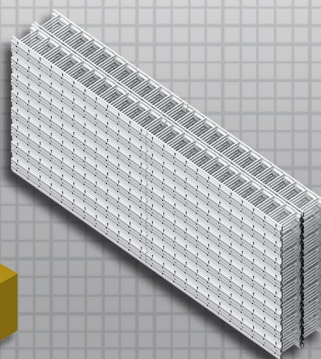

Ladder modular kit
Length 3000 mm, width 400 mm with square anti-slip rungs, vertical tread spacing 250mm



Cage hoop pallet
φ700 mm aluminum cage hoop, wrapped by stretch film



www.longdyes.com



OFFICE

Room 3006, Tower 3, Excellence Century Center,
No.31 Longcheng Road, Qingdao, China

PHONE: +86 532 83932416
MAIL: info@longdyes.com

FACTORY

No.8 Baolilai Road,
Qingdao, China